


# Suction Unit / 吸入装置

SAE 1 1/2" – SAE 5"

The asn suction unit has been developed to provide a compact unit in hydraulic systems. The asn suction unit is screwed to the asn adapter flange, which is welded to the tank. Due to low installation costs and compact design, purchasing asn suction units is cost effective. A switch (mechanical or inductive) can be mounted on the standard block for monitoring matters.

艾斯安公司的吸入装置已经发展成液压系统中不可缺少的液压元件。吸入装置由被焊接在油箱上的适配法兰固定。安装成本低、设计紧凑。机械或感应开关可以安装在标准块上进行监测。

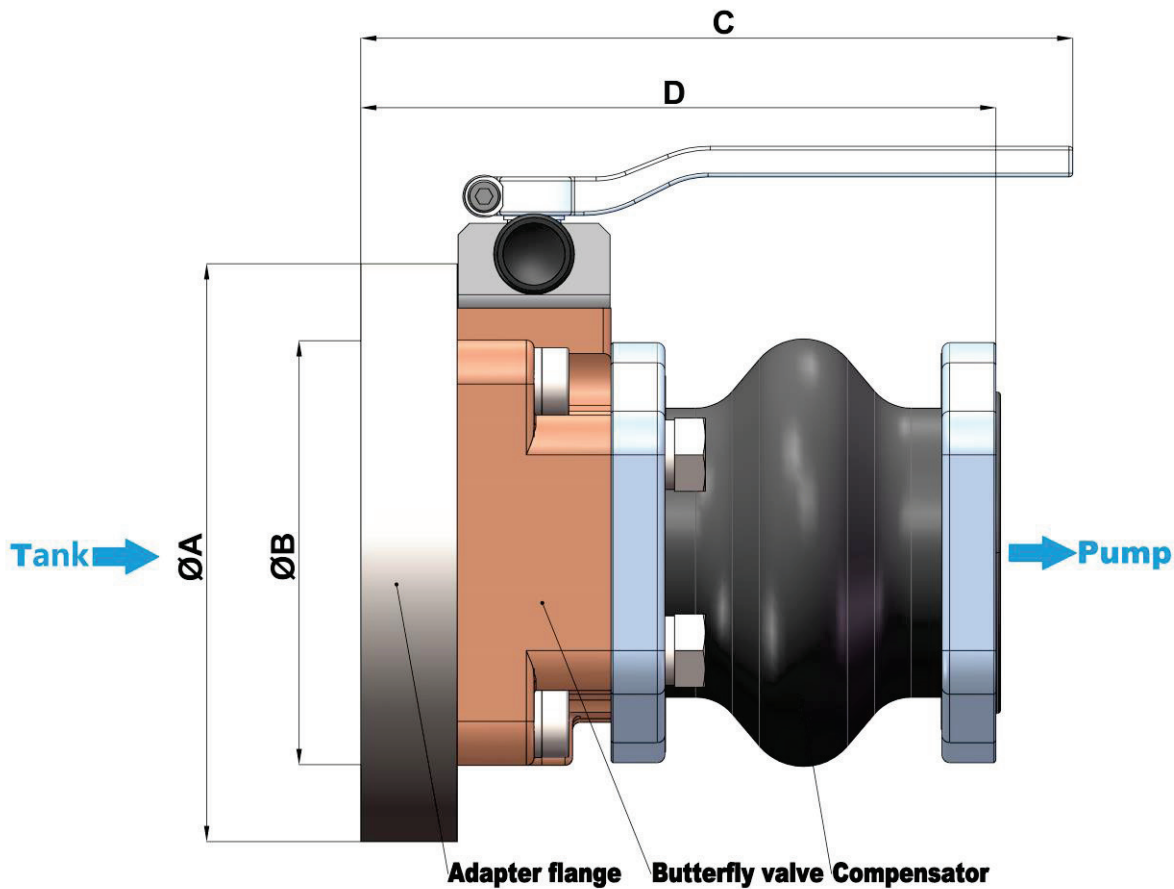

## Technical Data / 技术参数

order number	size		A	B	C	D	weight
	SAE	DIN	[mm]	[mm]	[mm]	[mm]	
SDBC0040T	1 1/2"	40	130	89	175	168	5,20
SDBC0050T	2"	50	150	103	175	168	6,20
SDBC0063T	2 1/2"	65	150	103	175	165	6,40
SDBC0080T	3"	80	150	110	175	165	7,50
SDBC0100T	4"	100	180	140	175	168	9,80
SDBC0125T	5"	125	205	165	175	198	11,60

## Working Ranges / 工作范围

working pressure range / 最高工作压力	0,2 – 1,5 bar
temperature range / 温度范围	-20°C to +80°C

